



**Collegare GOLD a
Swegon INSIDE Cloud**



Quali prodotti sono **INSIDE Ready**?

Unità GOLD prodotte nella settimana 22, 2023 o successive.

- Versione software 2.41 o successiva
- Certificati installati in produzione su prodotti realizzati a partire dalla settimana 22, 2023

Retrofit

- Versione software 2.42 o successiva
- Versione GOLD E / F




Come si collega un'unità
GOLD?

Collegamento di GOLD a Internet


1. Connessione Ethernet

Collegare un'estremità del cavo di rete alla rete esistente della struttura e l'altra estremità del cavo all'unità di trattamento aria (IQLogic).

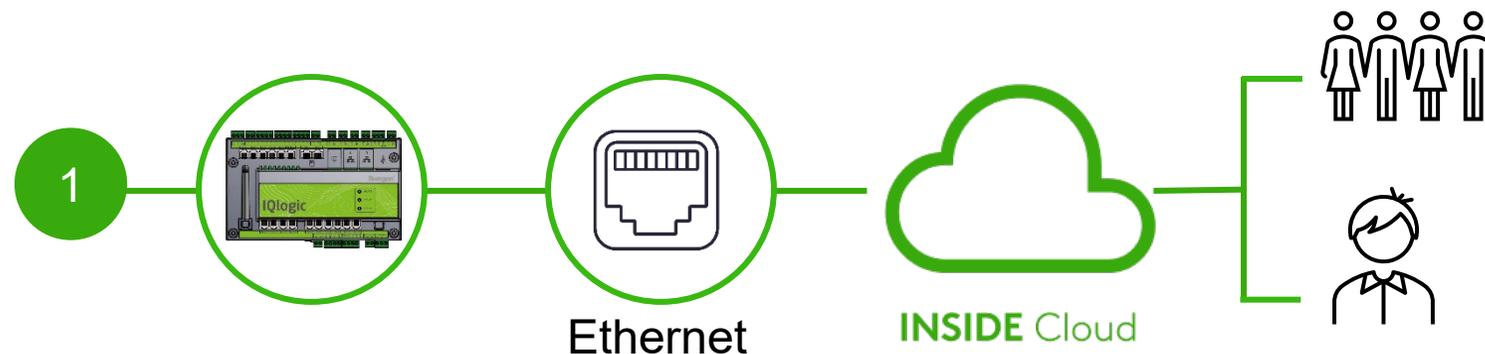

2. Rete mobile

Utilizzare un router 4G con scheda SIM, appositamente sviluppato per questo scopo.

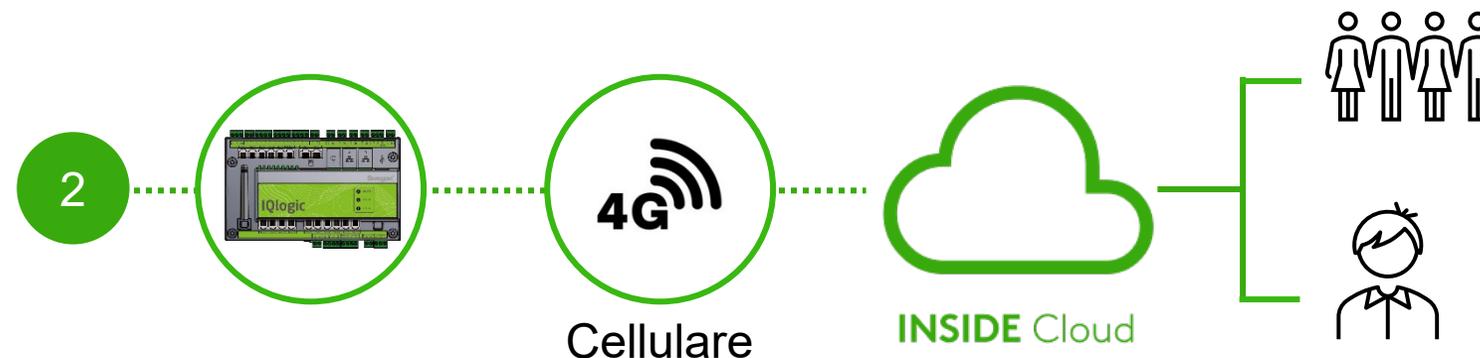


Attivare Swegon INSIDE su HMI/Web



Vai a "Comunicazione".

Verificare che i seguenti campi siano compilati correttamente:

- Indirizzo IP, maschera di sottorete, gateway predefinito, DNS primario
- Numero di serie del prodotto

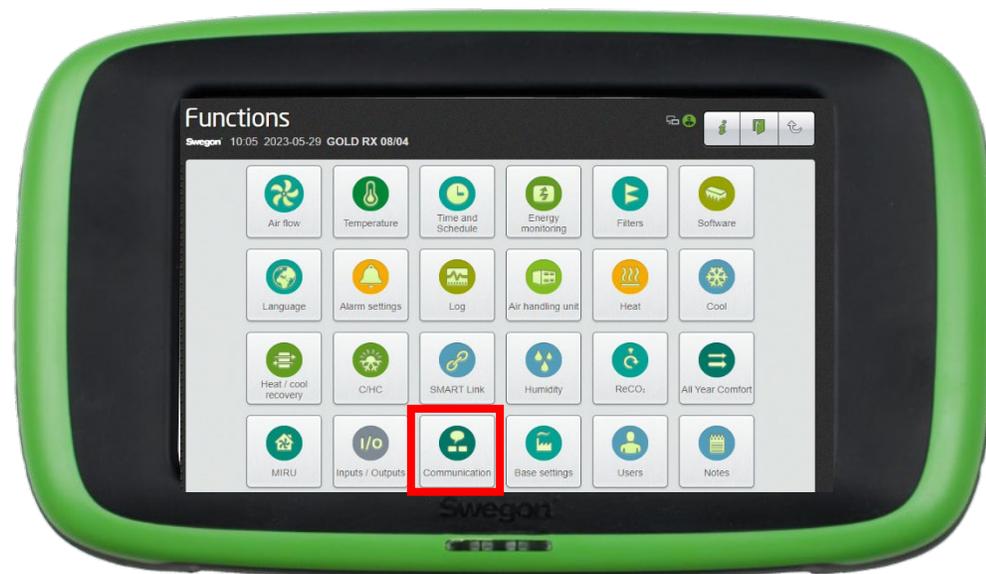

Creare un account

- Vai al [sito web di Swegon](#)
 - Supporto e software → Prodotti connessi
- 1 Richiedi l'accesso al portale INSIDE
- 2 Compilare il modulo e fare clic su "Invia".
 - Attendete quindi l'e-mail di invito al portale INSIDE.

Kom igång!

1

1. Begär åtkomst till INSIDE Portal	▼
2. Lägg till produkter i INSIDE Portal/Gör din produkt INSIDE Ready (endast för retrofit)	▼
3. Gå till INSIDE Portal	▼

Kom igång!

1. Begär tillgång till INSIDE Portal

Ange uppgifterna nedan för att begära ett konto.

Om du redan har ett konto och vill lägga till en ny produkt eller byggnad, kontakta digitalservices@swegon.com

Kontoinformation

Email (används som användarnamn)*

Förnamn*

Efternamn*

Företag*

Byggnads- och produktinformation

Välj produkt*
Välj ▼

Produktens serienummer*

Byggnadens namn*

Byggnadens adress*

Ort*

Land*
Välj ▼

Din integritet är viktig för oss. Swegon använder dina uppgifter till att förse dig med information om den begärda tjänsten. Du kan avregistrera dig från denna kommunikation när som helst. För mer information, se vår integritetspolicy.

skyddas av reCAPTCHA
inmatning - Vikor


SKICKA

2

1. Accedere al INSIDE Portal

Swegon INSIDE Portal

- <https://inside.swegon.com>

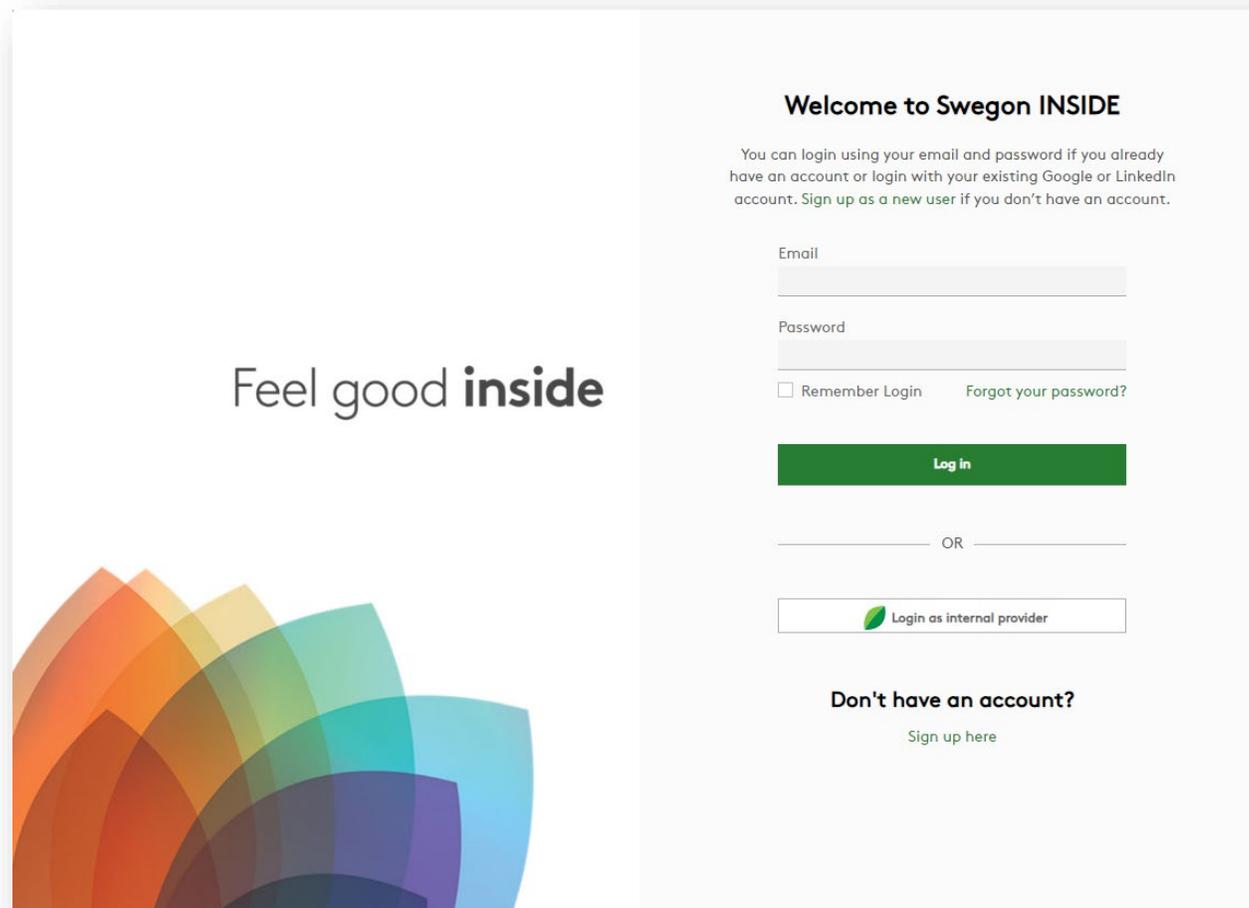

The screenshot shows the Swegon INSIDE Portal login interface. On the left, there is a decorative graphic of overlapping semi-circles in various colors (orange, yellow, green, blue, purple) and the text "Feel good **inside**". On the right, the login form is titled "Welcome to Swegon INSIDE". It includes a message: "You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account." Below this are input fields for "Email" and "Password". There are checkboxes for "Remember Login" and a link for "Forgot your password?". A green "Log in" button is positioned below the input fields. Below the button, there is an "OR" separator and a button labeled "Login as internal provider" with a small green leaf icon. At the bottom, there is a section titled "Don't have an account?" with a link "Sign up here".

Feel good **inside**

Welcome to Swegon INSIDE

You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account.

Email

Password

Remember Login [Forgot your password?](#)

Log in

OR

 Login as internal provider

Don't have an account?

[Sign up here](#)

2. Entrare nella sezione "Buildings"

The screenshot displays the Swegon user interface for an organization. The breadcrumb trail at the top reads "Home > Organisations > Company Name". A navigation menu on the left contains several icons, with the "Buildings" icon (a house) circled in red. The main content area is titled "Company Name" and features a "GO BACK" button on the left and an "EDIT ORGANISATION" button on the right. Below the title is a search bar labeled "Search for building name" with a magnifying glass icon. A table lists the buildings, with the "Head Office" entry circled in red. The table has columns for Name, City, Country, Number of products, and Role. Below the table, there are sections for "Organisation administrators" and "App users", both with expandable arrows. At the bottom right of the table area, it says "Rows per page: 100" and "1-1 of 1".

Home > Organisations > Company Name

← GO BACK EDIT ORGANISATION

Company Name

Buildings

Search for building name

Name	City	Country	Number of products	Role
Head Office	Stockholm	Sweden	0	Organisation Admin

Rows per page: 100 1-1 of 1

Organisation administrators


App users

PA

3. Fare clic su "Claim product".

The screenshot shows a web interface for a building management system. The breadcrumb navigation at the top reads "Home > Buildings > Head Office". A "GO BACK" button is located in the top left. The main heading is "Head Office" with the location "Stockholm, Sweden" and coordinates: "Latitude: 59.32576641998" and "Longitude: 18.070390739956". Below this is a "Products" section with a search bar containing the text "Search (name, serial number)". To the right of the search bar is a green button labeled "+ CLAIM PRODUCT", which is circled in red. Below the search bar is a table with the following columns: "Name ↑", "Product type", "Building", "Serial number", "Software version", "Active alarm", and "Connected". The table content is empty, with the message "Sorry, no matching records found". At the bottom right of the table area, it says "Rows per page: 100" and "0-0 of 0". Below the table is a section for "Building administrators". A sidebar on the left contains several icons, and a "PA" button is visible at the bottom left.

4. Inserire il numero di serie del prodotto e premere "SUBMIT" per confermare. Facendo clic al di fuori della casella di testo, è possibile aggiungere altri numeri di serie nello stesso modo.

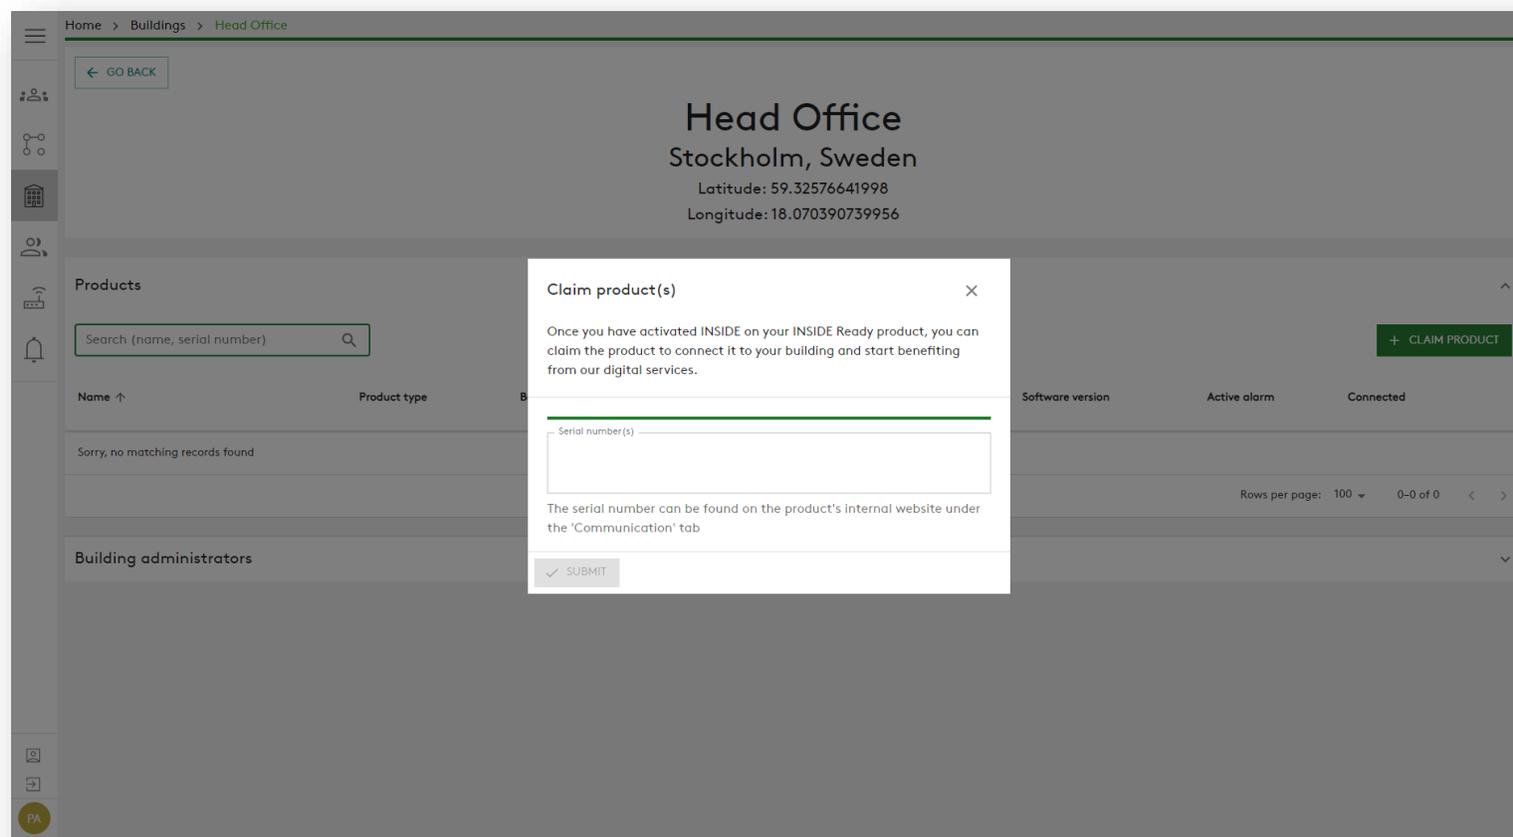

The screenshot shows a web application interface for managing buildings and products. The main heading is "Head Office Stockholm, Sweden" with coordinates: Latitude: 59.32576641998 and Longitude: 18.070390739956. A "Products" section is visible, featuring a search bar and a table with columns for Name, Product type, Software version, Active alarm, and Connected. A modal window titled "Claim product(s)" is open, displaying instructions: "Once you have activated INSIDE on your INSIDE Ready product, you can claim the product to connect it to your building and start benefiting from our digital services." Below the instructions is a text input field labeled "Serial number(s)" and a "SUBMIT" button. A "+ CLAIM PRODUCT" button is also visible in the background interface.

5. Prima di fare clic su Invia, è necessario assegnare un nome ai dispositivi. Quindi premere Invia.

Se il prodotto è già collegato a INSIDE Cloud, è necessario inserire l'indirizzo MAC del prodotto per richiederlo.

The screenshot displays the Swegon INSIDE Cloud interface for a building named 'Head Office' in 'Stockholm, Sweden'. A modal dialog titled 'Claim product(s)' is open, providing instructions on how to claim a product. The dialog shows two serial numbers, '1111111111' and '1122112211', which have been added to a list. Below the list, there are two input fields for naming the products, with the first field containing the text 'name *' and being circled in red. The dialog also includes a 'SUBMIT' button at the bottom.

Home > Buildings > Head Office

Head Office
Stockholm, Sweden

Claim product(s)

Once you have activated INSIDE on your INSIDE Ready product, you can claim the product to connect it to your building and start benefiting from our digital services.

Serial number(s)

1111111111 1122112211

The serial number can be found on the product's internal website under the 'Communication' tab

Name

The following product(s) needs a name to be able to be added to the building.

1111111111 GOLD name *

1122112211 GOLD name *

SUBMIT

GO BACK

Products

Search (name, serial number)

Name ↑ Product type Bu

Sorry, no matching records found

Building administrators

Software version Active alarm Connected

+ CLAIM PRODUCT

Rows per page: 100 0-0 of 0

6. Ora i prodotti sono stati configurati con successo.

The screenshot displays the Swegon web interface for the 'Head Office' building. The breadcrumb navigation shows 'Home > Buildings > Head Office'. A 'GO BACK' button is visible in the top left. The main heading is 'Head Office' with the location 'Stockholm, Sweden' and coordinates: Latitude: 59.32576641998, Longitude: 18.070390739956.

The 'Products' section is expanded, showing a search bar for 'Search (name, serial number)' and a '+ CLAIM PRODUCT' button. Below is a table with the following data:

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
GOLD1	GOLD	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

At the bottom of the products list, there is a pagination control: 'Rows per page: 100' and '1-2 of 2' with navigation arrows.

The 'Building administrators' section is currently collapsed.

The left sidebar contains navigation icons for Home, Users, Settings, Buildings, Products, and Notifications. At the bottom left, there is a 'PA' button.

7. Se i prodotti sono scollegati (come mostrato di seguito), è necessario verificare che Swegon INSIDE sia attivato sul prodotto e che abbia un certificato valido (INSIDE Ready).

The screenshot shows the Swegon INSIDE web interface for a building named 'Head Office' in Stockholm, Sweden. The interface includes a navigation menu on the left, a breadcrumb trail (Home > Buildings > Head Office), and a 'GO BACK' button. The main content area displays the building name and location, followed by a 'Products' section with a search bar and a '+ CLAIM PRODUCT' button. A table lists two products, both of which are disconnected, as indicated by red dots in the 'Connected' column.

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
GOLD1	GOLD	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

Rows per page: 100 ▾ 1-2 of 2 < >

Building administrators



**Se il vostro prodotto non ha un
certificato valido:**

Ecco come rendere il vostro prodotto
INSIDE Ready (Retrofit)

Assicurarsi di avere SW 2.42 o successivo

Retrofit



Attivare Swegon INSIDE su HMI/Web


Retrofit



Vai a "Comunicazione".

Verificare che i seguenti campi siano compilati correttamente:

- Indirizzo IP, maschera di sottorete, gateway predefinito, DNS primario
- Numero di serie del prodotto

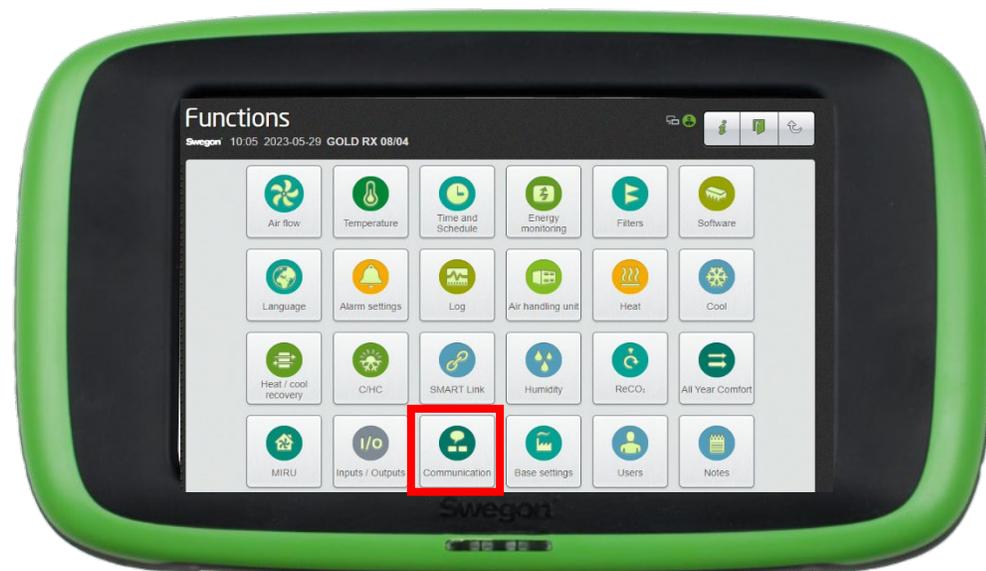

1. Accedere al proprio edificio e fare clic sul prodotto che si desidera rendere INSIDE Ready.

The screenshot shows the Swegon web interface for a building named 'Head Office' in Stockholm, Sweden. The page displays building information and a table of products. The 'GOLD1' product is circled in red.

Home > Buildings > Head Office

← GO BACK

Head Office

Stockholm, Sweden
Latitude: 59.32576641998
Longitude: 18.070390739956

Products

Search (name, serial number)


+ CLAIM PRODUCT

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
GOLD1	GOLD	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

Rows per page: 100 ▾ 1-2 of 2 < >

Building administrators

2. Premere il pulsante "MAKE INSIDE READY".

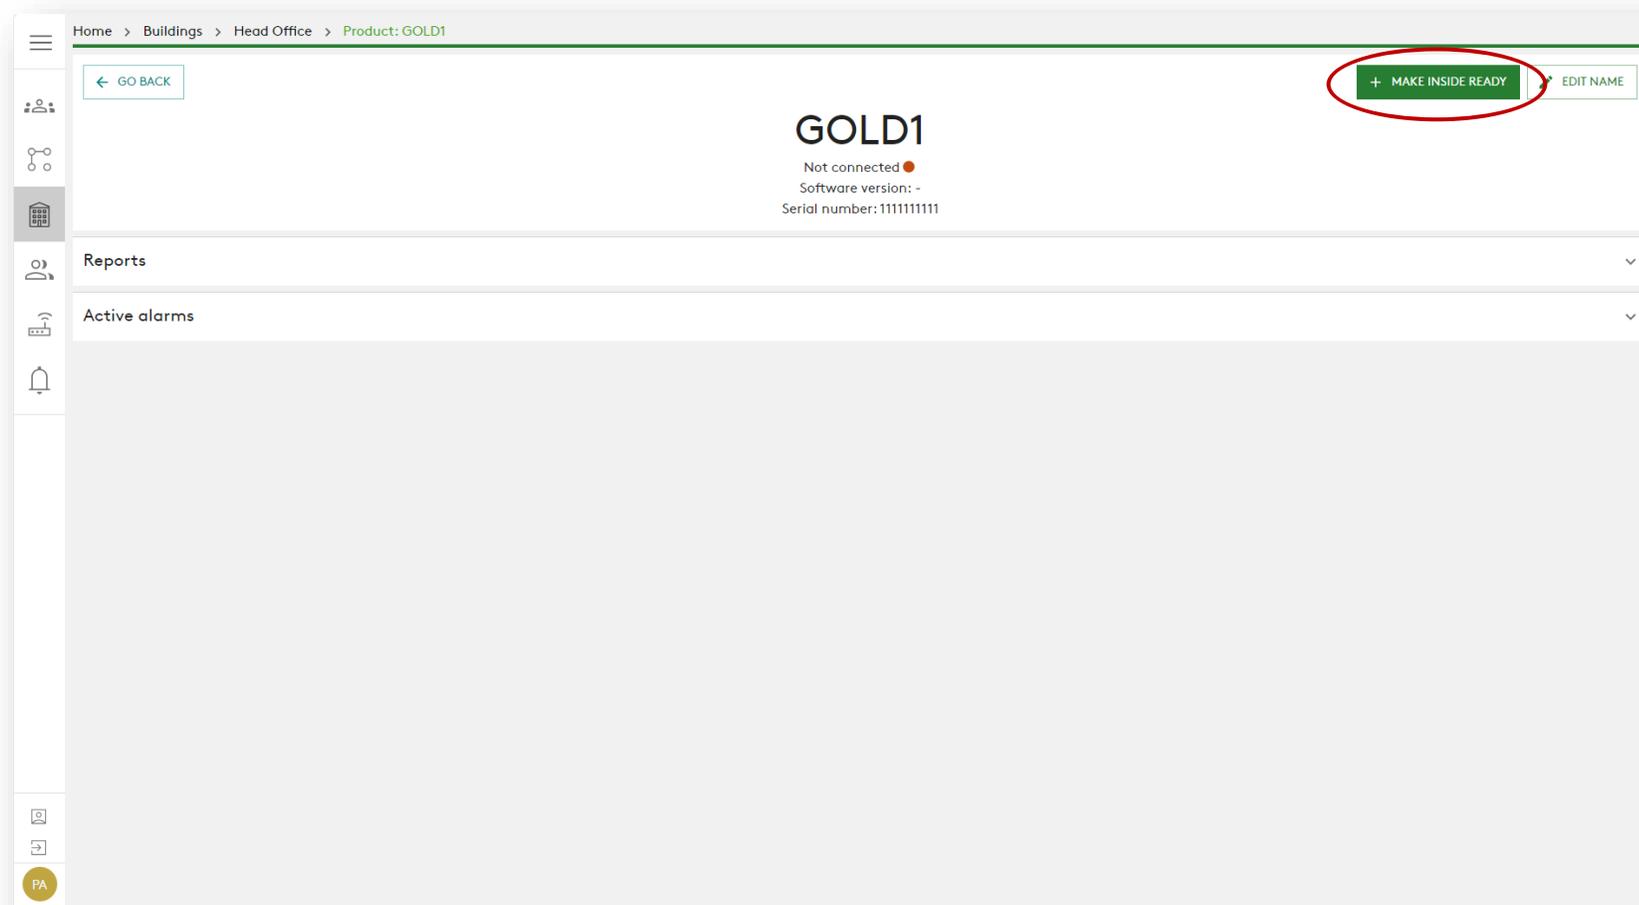

Home > Buildings > Head Office > Product: GOLD1

← GO BACK

GOLD1
Not connected ●
Software version: -
Serial number: 1111111111


+ MAKE INSIDE READY EDIT NAME

Reports

Active alarms


PA

3. Inserire l'indirizzo MAC del prodotto e premere "Submit".

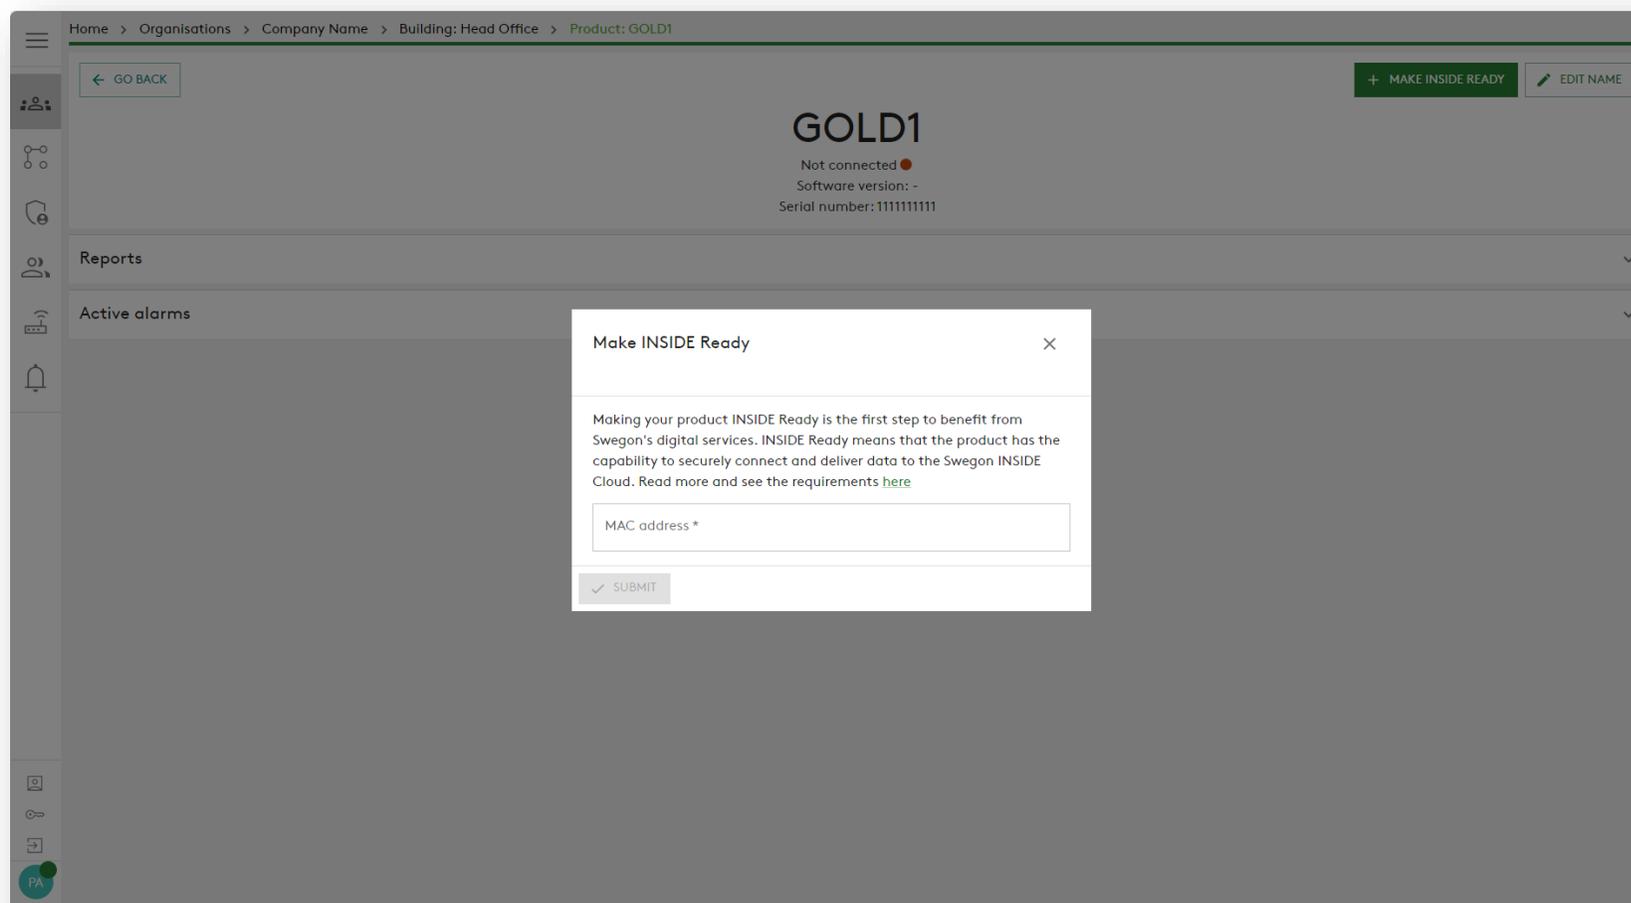

The screenshot displays a web application interface for managing a product named 'GOLD1'. The breadcrumb navigation at the top reads: Home > Organisations > Company Name > Building: Head Office > Product: GOLD1. A sidebar on the left contains icons for users, connections, reports, active alarms, and a notification bell. The main content area shows the product name 'GOLD1' with a status of 'Not connected' and a red dot. Below this, the software version is listed as '-' and the serial number as '1111111111'. Two buttons are visible: '+ MAKE INSIDE READY' and 'EDIT NAME'. A modal dialog box titled 'Make INSIDE Ready' is open in the center, containing the following text: 'Making your product INSIDE Ready is the first step to benefit from Swegon's digital services. INSIDE Ready means that the product has the capability to securely connect and deliver data to the Swegon INSIDE Cloud. Read more and see the requirements [here](#)'. Below the text is a text input field labeled 'MAC address *' and a 'SUBMIT' button with a checkmark icon.

3. Copiare l'ID e il codice di attivazione e incollarli nell'apposito campo di testo dell'HMI del prodotto e premere "Activate".

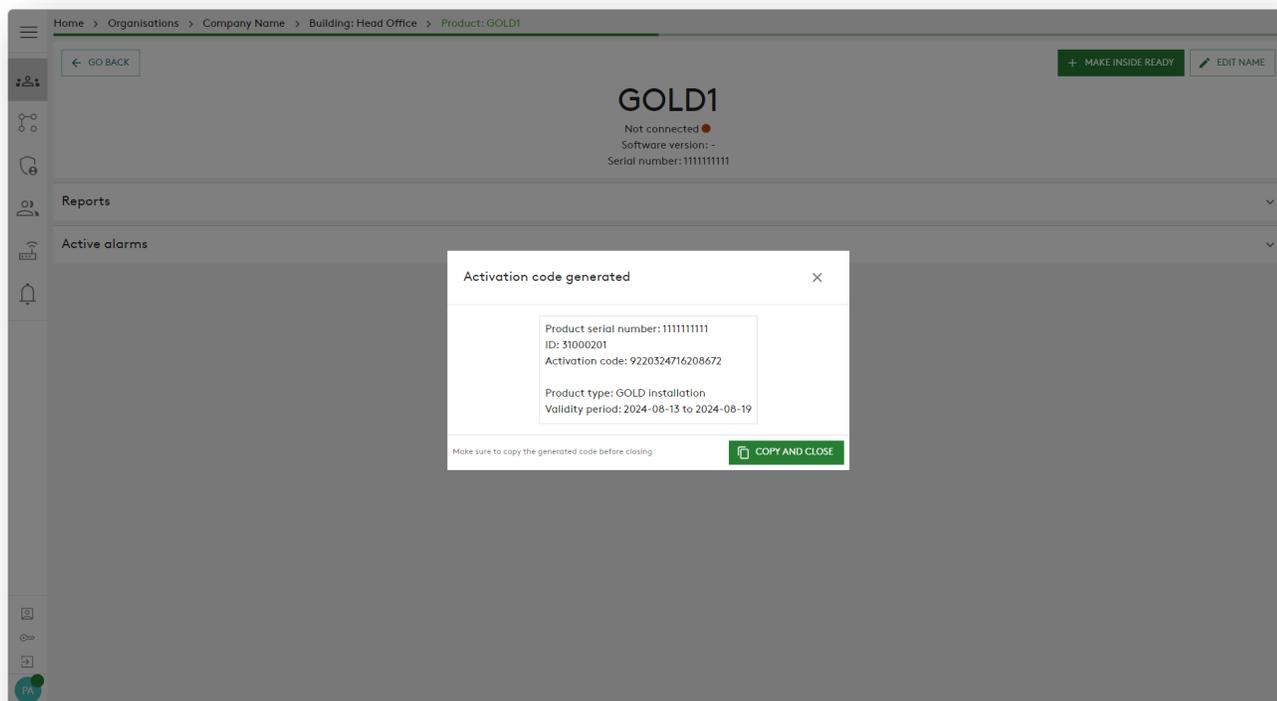

Per le unità GOLD, i campi di testo si trovano sotto la voce "Comunicazione".

4. Quando i prodotti sono collegati e condividono i dati con INSIDE Cloud, i punti si illuminano di verde.

The screenshot displays the Swegon INSIDE Cloud interface for the 'Head Office' in Stockholm, Sweden. The interface includes a navigation menu on the left, a breadcrumb trail (Home > Buildings > Head Office), and a 'GO BACK' button. The main content area shows the building name and location, along with its latitude and longitude. Below this is a 'Products' section with a search bar and a '+ CLAIM PRODUCT' button. A table lists two products, GOLD1 and GOLD2, both of type 'GOLD' and located at 'Head Office'. The 'Connected' column for both products shows a green dot, indicating they are connected. A red circle highlights these green dots. The table also includes columns for 'Name', 'Product type', 'Building', 'Serial number', 'Software version', and 'Active alarm'. At the bottom, there is a 'Building administrators' section and a 'PA' button.

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
GOLD1	GOLD	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

INSIDE Portal

INSIDE Portal è la piattaforma per tutti i prodotti Swegon connessi e l'hub per i servizi digitali di Swegon.


INSIDE Portal

- L'hub per tutti i prodotti Swegon collegati.

Il portale INSIDE vi offre l'opportunità di:

- Monitoraggio dei parametri chiave
 - Stato del flusso d'aria, perdite di carico, temperature, ecc.
 - Allarmi attivi
- Creare ed esportare rapporti sull'energia
- Ottenere informazioni generali sulle prestazioni dell'UTA
 - Attivate facilmente i servizi aggiuntivi che possono aumentare l'efficienza del vostro sistema.
 - Invitare gli utenti del portale a condividere gli approfondimenti e delegare il livello di accesso

Il INSIDE Portal è gratuito

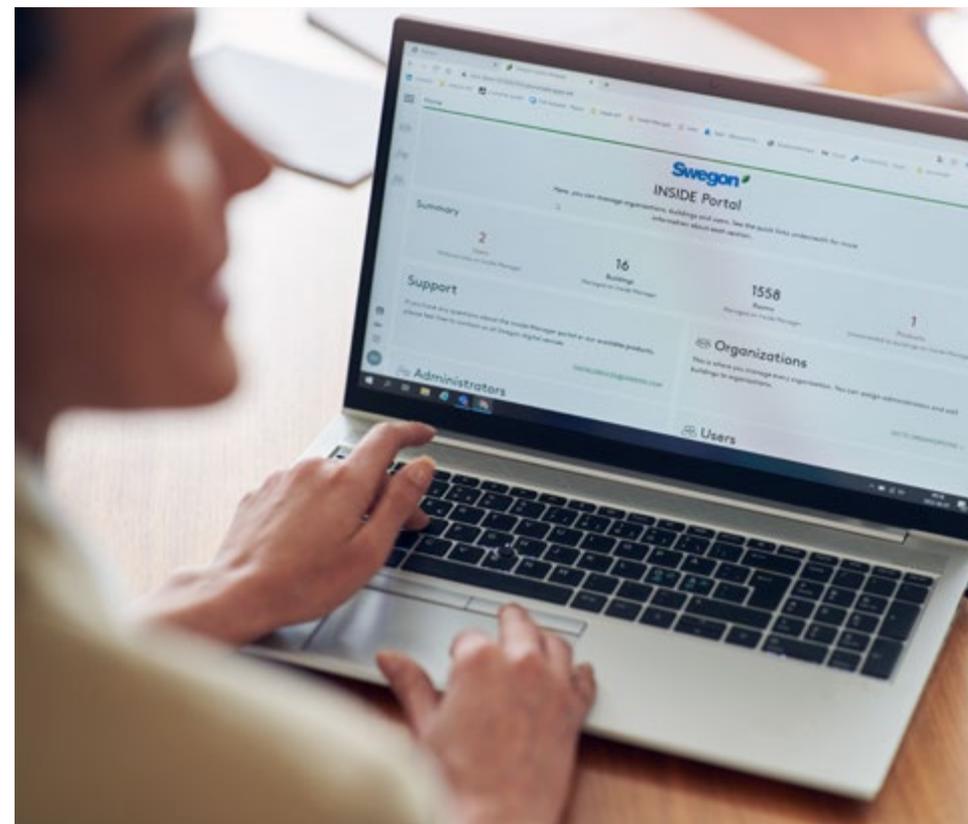

Portale INSIDE - Notifiche di allarme via e-mail

Ricevere notifiche di allarme via e-mail dai dispositivi connessi

The screenshot displays the 'Alarm subscriptions' page in the Swegon INSIDE portal. The page title is 'Home > Alarm subscriptions'. Below the title, there is a section 'My alarm subscriptions' with a search bar and three action buttons: 'DELETE SELECTED', 'EDIT SELECTED', and '+ ADD ALARM SUBSCRIPTION'. A table lists the subscriptions with columns for checkboxes, product names, severity levels, building names, cities, countries, product types, and organizations. The table contains 13 rows of data.

<input type="checkbox"/>	Product name	Notify at (severity)	Building name	City	Country	Product type	Organisation
<input type="checkbox"/>	Kv Målet 1, Umeå	A B	Swegon Umeå	Umeå	Sweden	SuperWISE	Swegon
<input type="checkbox"/>	Åbyhøj GOLD	A B	Swegon Åbyhøj	Åbyhøj	Denmark	GOLD	Swegon Denmark
<input type="checkbox"/>	Zeta Sky Hi R7 (R32)	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	Titan Sky Hi R0 HP	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	GEYSER Sky R0 (R290)	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	Epsilon Sky Hi	A	Swegon Cantarana	Cantarana	Italy	BlueBox Epsilon SKY	Swegon
<input type="checkbox"/>	Boställsvägen 1 Örebro	A B T	Swegon Örebro	Örebro	Sweden	SuperWISE	Swegon
<input type="checkbox"/>	SWEGON BUREAU	A B T	Swegon France Lyon	Lyon	France	SuperWISE	Swegon
<input type="checkbox"/>	Zeta Rev	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	TA/FA 73	A B T	Swegon Kvånum	Kvånum	Sweden	GOLD	Swegon
<input type="checkbox"/>	OPEN SPACE	A	Swegon Cantarana	Cantarana	Italy	GOLD	Swegon

Portale INSIDE - Notifiche di allarme via e-mail

Scegliete quali avvisi desiderate ricevere via e-mail

The screenshot shows the 'Add alarm subscriptions' dialog box in the Swegon INSIDE portal. The dialog lists various alarm subscriptions with columns for Product name, Notify at (severity), Building name, City, Country, Product type, and Organisation. Each row has checkboxes for severity levels A, B, and I.

Product name	Notify at (severity)	Building name	City	Country	Product type	Organisation
	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I					
Boställsvägen 1 Örebro	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Örebro	Örebro	Sweden	SuperWISE	Swegon
SWEGON BUREAU	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon France Lyon	Lyon	France	SuperWISE	Swegon
TA/FA 73	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Kvänum	Kvänum	Sweden	GOLD	Swegon
Äbyhøj GOLD	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Äbyhøj	Äbyhøj	Denmark	GOLD	Swegon Denmark
Kv Målet 1, Umeå	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Umeå	Umeå	Sweden	SuperWISE	Swegon
TA 12	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Gothenburg	Gothenburg	Sweden	GOLD	Swegon
GOLD 2005646491	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Sundsvall	Sundsvall	Sweden	GOLD	Swegon
Swegon - Brandby	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Brandby	Brandby	Denmark	SuperWISE	Swegon Denmark
Swegon Malmö	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Malmö	Malmö	Sweden	SuperWISE	Swegon
Swegon Goteborg	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Gothenburg	Gothenburg	Sweden	SuperWISE	Swegon
LB03 Luleå	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Luleå	Luleå	Sweden	GOLD	Swegon
GOLD Umeå	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Umeå	Umeå	Sweden	GOLD	Swegon
Norrköping kontor	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> I	Swegon Norrköping	Norrköping	Sweden	SuperWISE	Swegon

Buttons: EDIT SELECTED, + ADD ALARM SUBSCRIPTION, SUBMIT

Portale INSIDE: Panoramica dei dispositivi connessi



Home > buildings

Buildings

Search for building name

Name ↑	City	Country	Number of products	Organization
Swegon Borås	Borås	Sweden	1	Swegon
Swegon Cantarana	Cantarana	Italy	3	Swegon
Swegon France Lyon	Lyon	France	1	Swegon
Swegon Gembloux	Gembloux	Belgium	1	Swegon
Swegon Gothenburg	Gothenburg	Sweden	1	Swegon
Swegon Kvänum	Kvänum	Sweden	3	Swegon
Swegon Kvänum Testcenter	Kvänum	Sweden	2	Swegon
Swegon Luleå	Luleå	Sweden	1	Swegon
Swegon Malmö	Malmö	Sweden	1	Swegon
Swegon Norrköping	Norrköping	Sweden	1	Swegon
Swegon Örebro	Örebro	Sweden	1	Swegon
Swegon Stockholm	Stockholm	Sweden	1	Swegon
Swegon Tomelilla	Tomelilla	Sweden	1	Swegon
Swegon Umeå	Umeå	Sweden	1	Swegon

Rows per page: 100 ▾ 1-14 of 14 < >

Panoramica completa di tutti gli edifici della vostra organizzazione

- Nome dell'edificio
- Posizione dell'edificio
- Numero di prodotti

Portale INSIDE: Panoramica dei dispositivi connessi



Home > buildings > Swegon Kvänum

← GO BACK

Swegon Kvänum

Kvänum, Sweden
Latitude: 58.2980300699508
Longitude: 13.189557

Products

Search (name, serial number) 🔍

Name	Product type	Building	Serial number	Software version	Active alarm	Connected
Kvänum Tellus, Casa	GOLD	Swegon Kvänum	G00403364	2.42		●
Swegon Kvänum	WISE	Swegon Kvänum	6V5M1U5CIUTPHT38WDXD	1.160.1		●
TA/FA 37	GOLD	Swegon Kvänum	G320716	2.42		●

Rows per page: 10 ▾ 1-3 of 3 < >

Rooms

Building administrators

FR

Panoramica completa dei prodotti Swegon in ogni edificio

- Posizione
- Versione software
- Allarmi attivi
- Stato della connessione

Portale INSIDE: Monitoraggio delle prestazioni



← GO BACK

EDIT NAME

GOLD RXHC 12

Connected ●
Software version: 2.42
Serial number: 2006392391

Information

AHU status	
AHU status	Damper switch off delay
Supply air	
Supply air	15.9 °C
Supply air flow	803.0 l/s
Supply air fan power consumption	0.6 kW
Supply air duct pressure	112.5 Pa
Supply filter	
Supply air internal filter	106.7 Pa
Supply air internal filter alarm	0.0 Pa
Extract air	
Extract air	23.0 °C
Extract air flow	800.0 l/s
Extract air duct pressure	109.3 Pa
Extract air fan power consumption	0.5 kW
Extract filter	
Extract air internal filter	66.5 Pa

Monitor:

- Stato di funzionamento
- Parametri chiave
- Dati energetici
- Allarme

Live: sempre il valore più recente

Temperature
 °C
 °F

Pressure
 Pa
 psi
 in.wc

Airflow
 l/s
 cfm
 m³/s
 m³/h

Portale INSIDE: Monitoraggio delle prestazioni

Energy

Cool power recovery	0.0 kW
Specific fan power	1.4 kW/m ³ /s
Temperature efficiency	0.0 %
Heat power recovery	0.0 kW
Temperature efficiency	0.0 %
Heat exchange motor energy consumption since unit installation	0.2 MWh
Heat energy consumption since unit installation	12.0 MWh
Total Heat Cool energy consumption since unit installation	16.1 MWh
Total energy recovery since unit installation	59.6 MWh
Total air fan energy consumption since unit installation	8.4 MWh
Supply air fan energy consumption	1.3 MWh
Heat energy recovery since unit installation	59.2 MWh
Supply air fan energy consumption since unit installation	4.2 MWh
Extract air fan energy consumption	1.2 MWh
Total AHU energy consumption since unit installation	8.6 MWh
Heat exchange motor power consumption	0.0 kW
Extract air fan energy consumption since unit installation	4.2 MWh
Cool energy recovery since unit installation	0.5 MWh
Total AHU energy consumption	2.6 MWh
Heat exchange motor energy consumption	0.0 MWh
Cool energy consumption since unit installation	4.1 MWh

Alarms

Alarm priority A triggered	0
Alarm priority B triggered	0

Informazioni dettagliate
sugli allarmi attivi

Alarms

Name	Raised at
Info 98:7 Extract air air handling unit filter calibration not performed	2023-07-19 07:24
Info 98:5 Supply air air handling unit filter calibration not performed	2023-07-19 07:24

Portale INSIDE: Rapporti sull'energia



Home > buildings > Swegon Kvänum > Product: Kvänum Tellus, Casa

Connected ●
Software version: 2.42
Serial number: G00403364

Information

Reports

CREATE REPORT DOWNLOAD REPORT ↓ DELETE REPORT(S)

Created	Status	From	To
<input checked="" type="checkbox"/> 2023-05-29 08:10	Completed	2023-05-01	2023-05-29
<input type="checkbox"/> 2023-05-10 07:54	Completed	2023-04-01	2023-05-02
<input type="checkbox"/> 2023-04-13 08:04	Completed	2023-03-17	2023-04-13
<input type="checkbox"/> 2023-04-11 13:48	Completed	2023-04-05	2023-04-10
<input type="checkbox"/> 2023-04-07 17:56	Completed	2023-03-16	2023-04-07
<input type="checkbox"/> 2023-03-27 10:17	Completed	2023-03-20	2023-03-27
<input type="checkbox"/> 2023-03-14 10:03	Completed	2023-03-06	2023-03-13

1 row selected Rows per page: 10 1-7 of 7



Uploads

Generare report energetici in modo semplice e veloce

Resoconto sull'energia


Analisi delle prestazioni

Generare il resoconto sull'energia con l'intervallo di tempo e il livello di dettaglio desiderati.

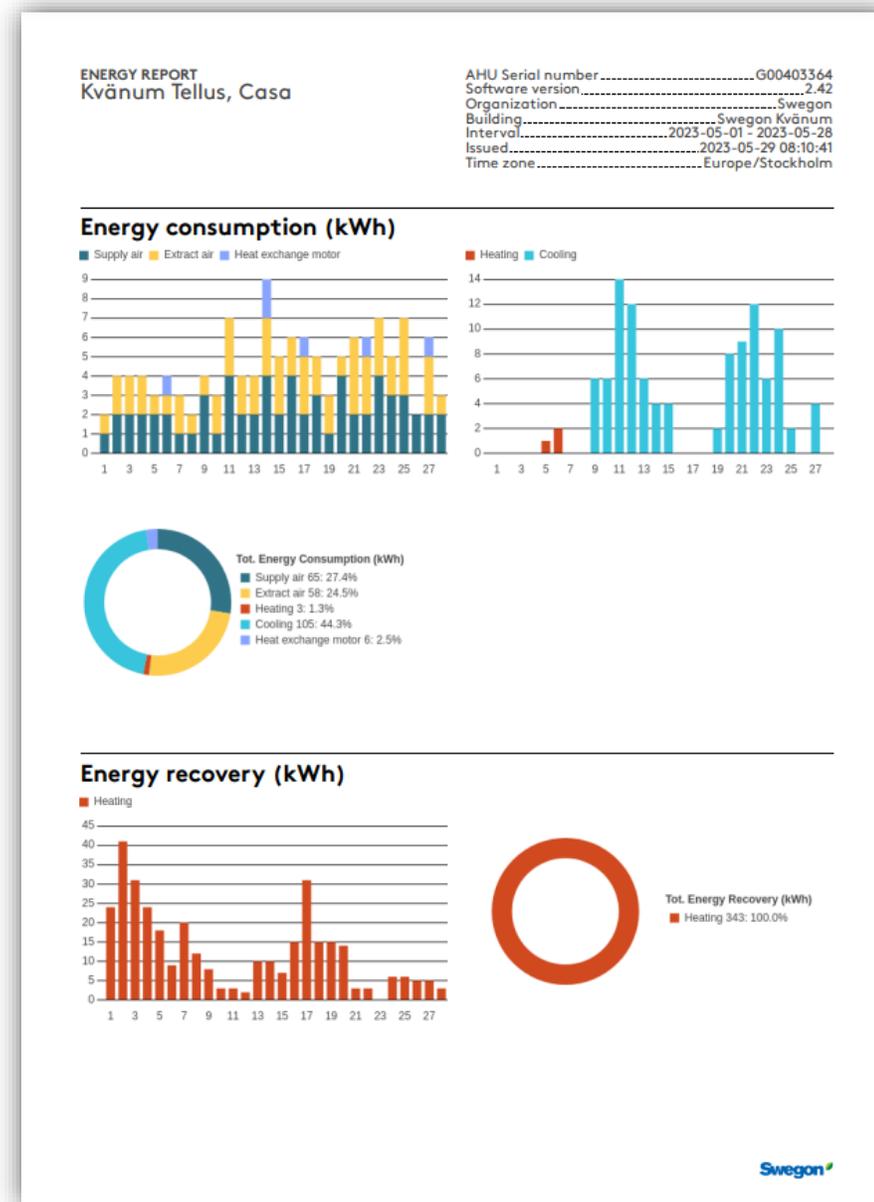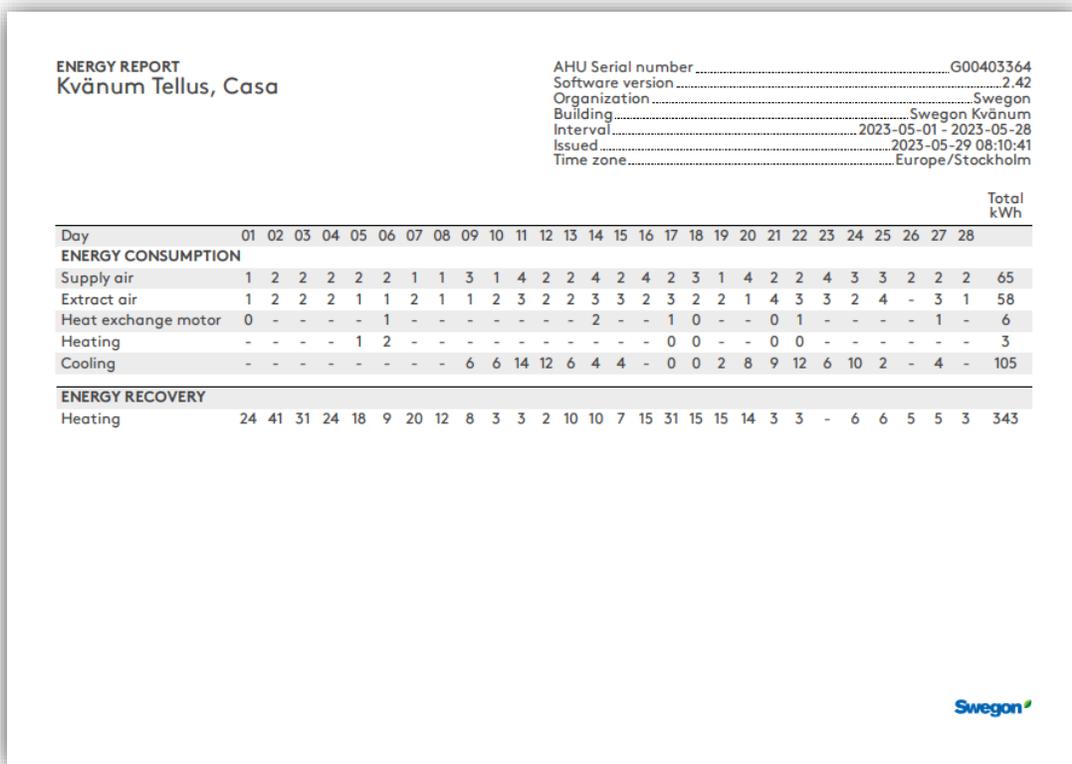


Portale INSIDE: Accesso


Link al portale INSIDE: <https://inside.swegon.com/>

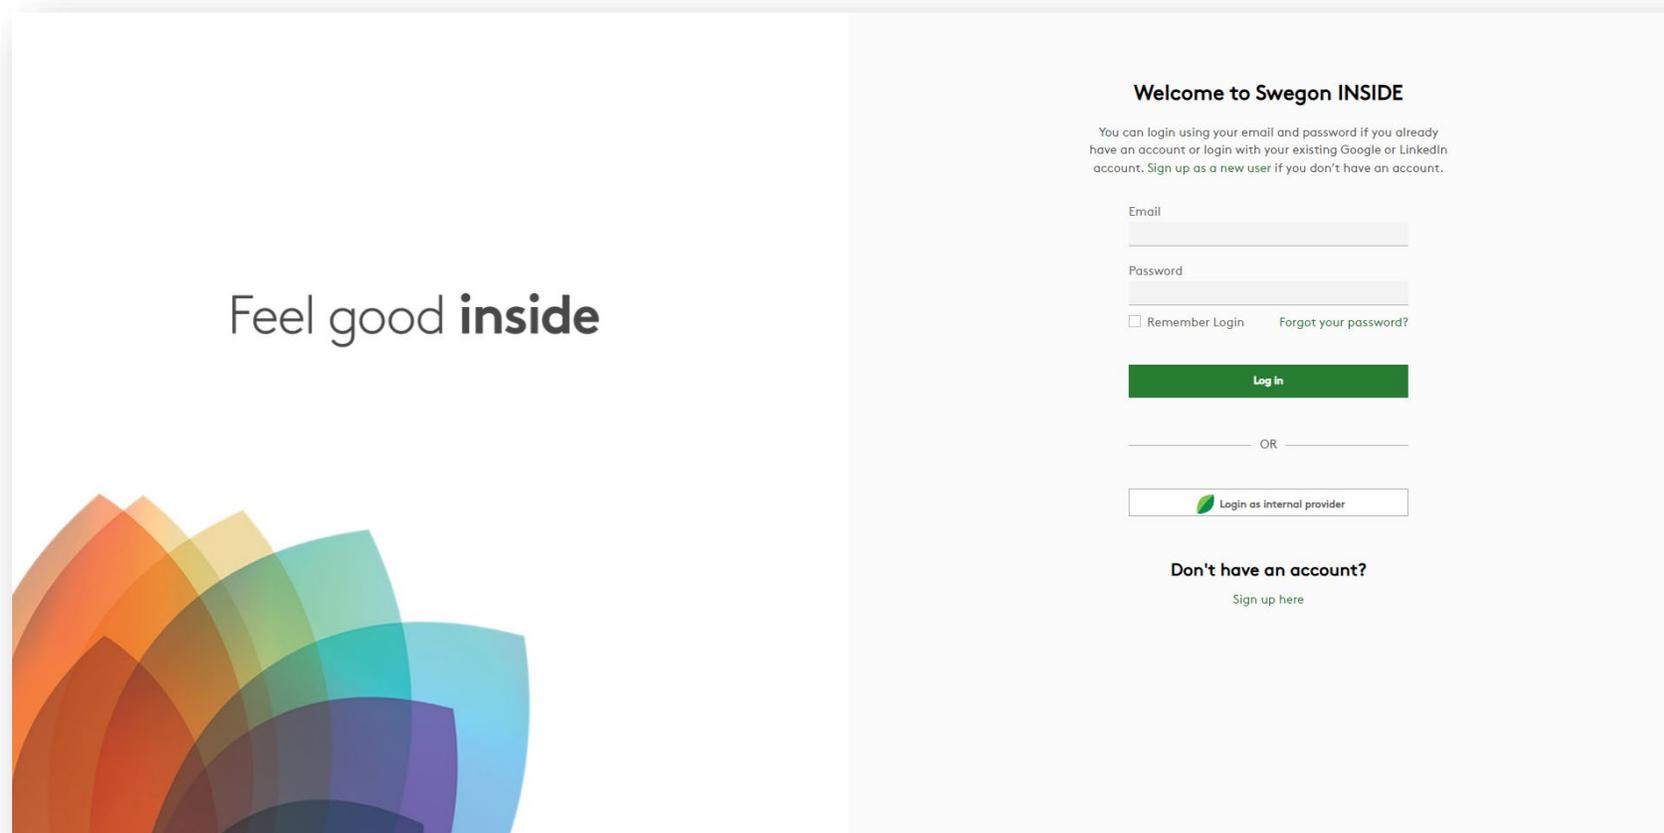

Diversi modi per monitorare l'unità GOLD

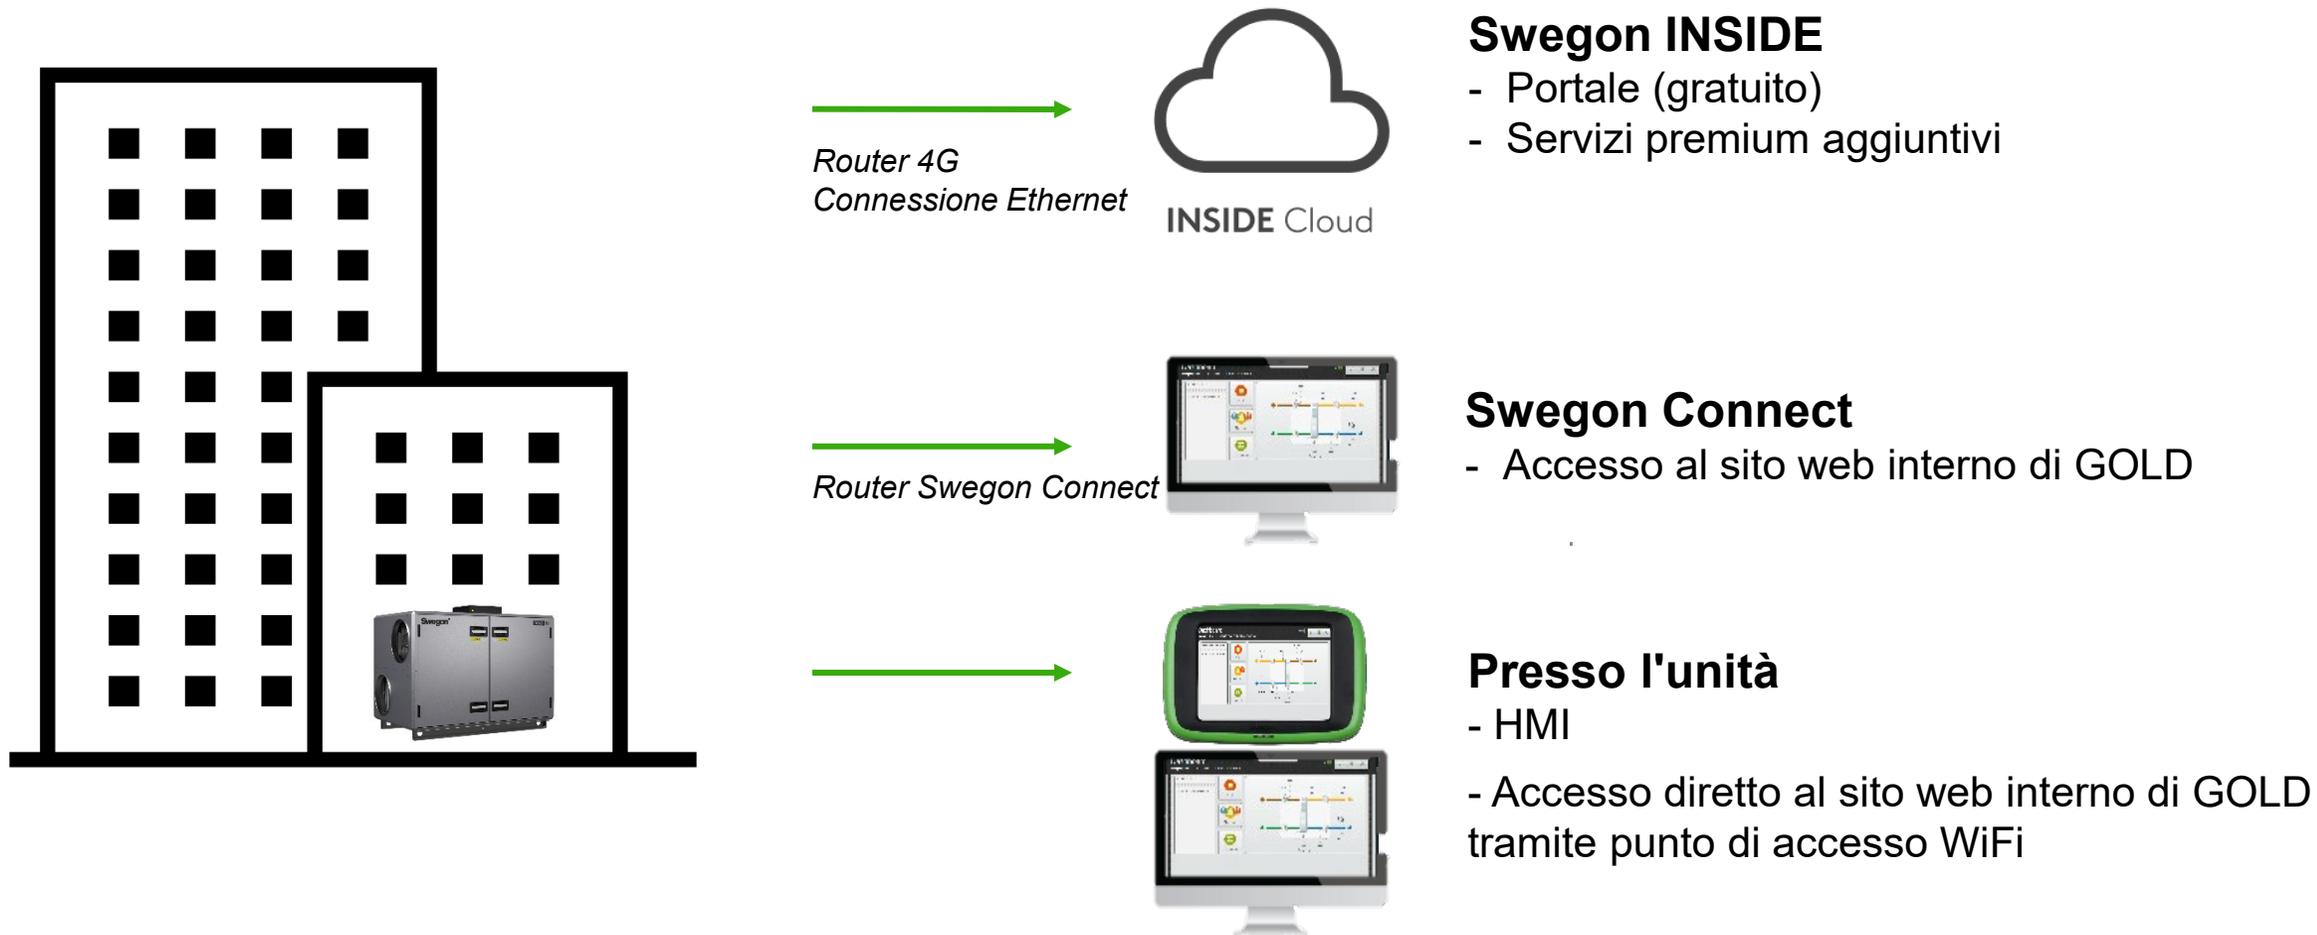

Servizi digitali

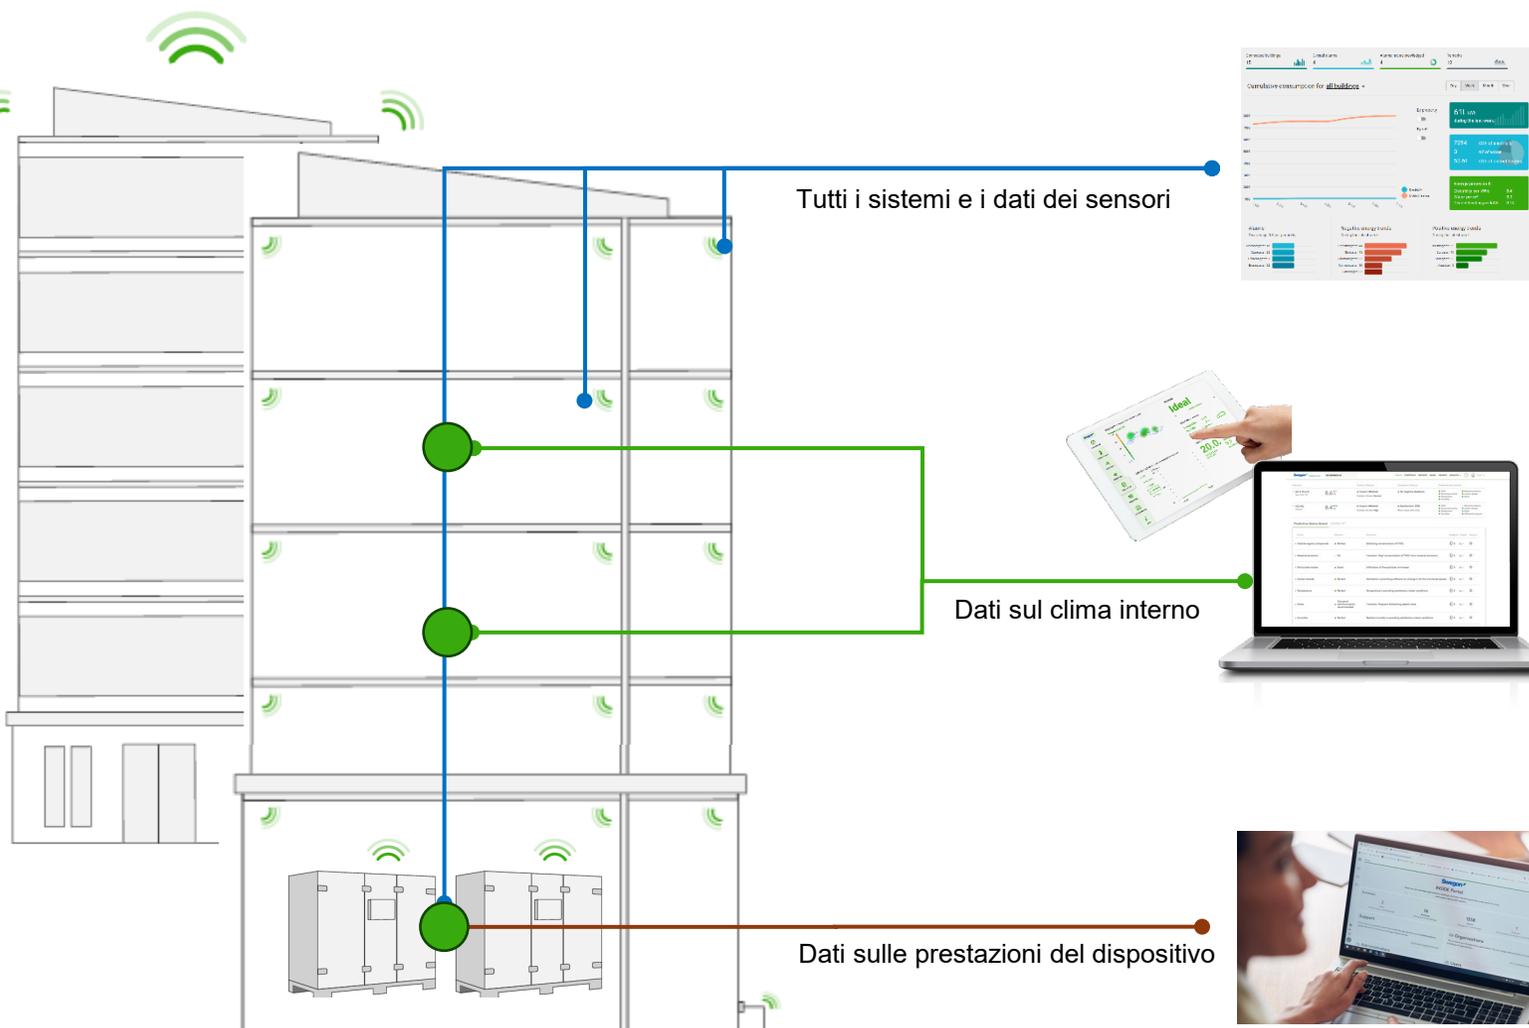

INSIDE Director

Combinazione di funzioni BMS e EMS per un edificio completo.

INSIDE Analytics & Visualiser

Analisi e visualizzazione del clima interno.

INSIDE Portal

Monitoraggio remoto dei parametri chiave dell'UTA, degli allarmi attivi e del consumo energetico.

Swegon 





Feel good **inside**